

LogTag

TRID30-7R, TRED30-7R


Battery replacement

© Copyright LogTag Recorders, 2010

1.0 Remove battery

Procedure:-


- 1.1 Use a small bladed screwdriver to remove the rear label covering the battery door.

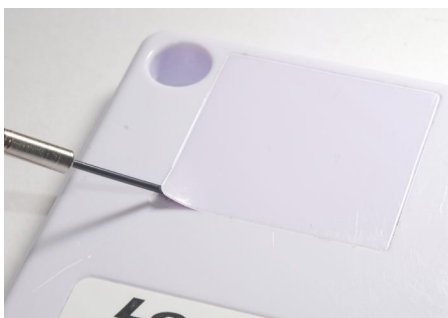

- 1.2 Turn battery door anti-clockwise and remove from case.



- 1.4 Use a small blade screwdriver to remove battery as shown.

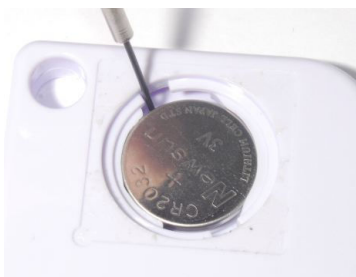

2.0 Insert battery

Procedure:-

- 2.1 Put a new replacement C2032 cell into battery compartment as shown below:

The right hand edge of the battery is inserted first against the contact.



Press firmly down on the left hand side of the battery to click the battery into place.



- 2.2 Replace battery door, turn clockwise to lock into case.



- 2.3 Cover battery door with either a new label (Part # 100-000502) or reuse the old one.

